

## SAC0307 4-5MH098

*No Clean Solder Paste*



### Product Description

Asahi SAC0307, SnAg0.3Cu0.7 solder alloy was developed to have better wettability in re-flow soldering process. This alloy is designed to be substituted for tin/lead alloys in all electronics assembly soldering operations. Some adjustment to equipment settings will be required but the resulting soldered joints will perform as well as tin/lead solder joints in most respects.

SAC0307 4-5MH098 solder paste exhibits long stencil life and tack time, while still delivering exceptional solderability. It possesses excellent printing characteristics to a wide variety of metallization with an anti-slump property.

### Application


SAC0307 4-5MH098 is designed for standard stencil printing. The printing speed can be set at 25 - 150 mm/sec. Its optimum printing condition is 23 to 25 °C and humidity of 50 to 65 %RH, with at least 24 hours stencil life of continuous printing (process dependant). This paste could be used on the 0.4mm pitch pattern. Adjustment may be necessary based on specific process requirement.

### Specification (Preliminary)

Item	Result
<b>Alloy</b>	
Alloy Composition	Sn/Ag0.3/Cu0.7
Melting Temperature	217 - 227 °C
<small>Differential Scanning Calorimetry</small>	
Powder Size	20 – 38 μm, Type IV, Mesh Size -400 / +635
<small>IPC TM-650 2.2.14</small>	
<b>Paste Flux</b>	
Flux Content	11.5 +/- 1.0 wt%
<small>IPC-TM-650 2.2.34.1</small>	
Halide Content	Not detected
<small>JIS Z 3197 8.1.4.2.1</small>	
Water Extract Resistivity	> 1 x 10 <sup>4</sup> Ω-cm
<small>JIS Z 3197 8.1.1</small>	
Copper Mirror Test	Classified as “L”, Pass
<small>IPC-TM-650 2.3.32</small>	
Copper Corrosion Test	Pass
<small>IPC-TM-650 2.6.15</small>	
Flux Activity Classification	ROLO
<small>IPC J-STD-004</small>	
<b>Solder Paste</b>	
Viscosity (2 <sup>nd</sup> day)	750 ± 250 kcPs
<small>IPC-TM-650 2.4.34</small>	
<small>JIS Z 3284 Annex 6</small>	165 ± 55 Pa.s
Thixotropic Index	0.40- 0.70
<small>JIS Z 3284 Annex 6</small>	
Tackiness	> 24hrs (> 100gf)
<small>JIS Z 3284 Annex 9</small>	
Surface Insulation Resistance	
<small>(85°C, 85%RH, 168hrs)</small>	
<small>IPC-TM-650 2.6.3.3</small>	> 1 x 10 <sup>8</sup> Ω, Pass
Electromigration	Pass
<small>(85°C, 88.5%RH, 596hrs)</small>	
<small>IPC-TM-650 2.6.14.1</small>	
Slump Test	Pass
<small>IPC-TM-650 2.4.35</small>	
Solder Ball Test	Pass
<small>IPC-TM-650 2.4.43</small>	
<small>JIS Z 3284 Annex 11</small>	
Residue Dryness Test	Pass
<small>JIS Z 3284 Annex 12</small>	

# SAC0307 4-5MH098 No Clean Solder Paste

## Recommended Reflow Profile

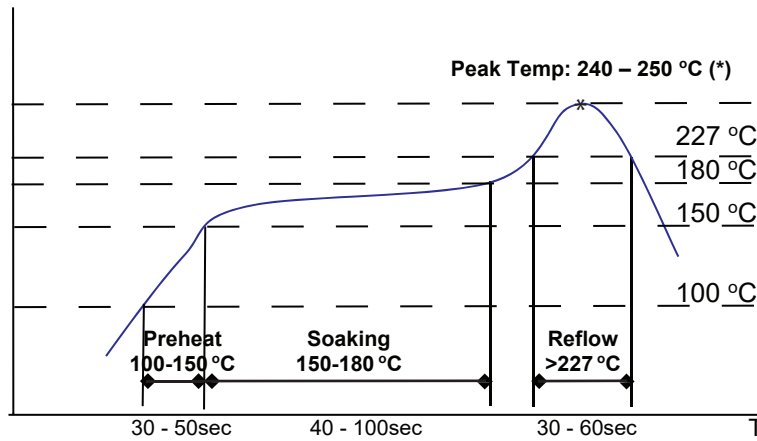

This profile is simply a guideline. For more advice on profiling, please contact Asahi technical support.

(\*) Note: Minimal peak temperature to be achieved but is dependent on PCB design/material and process capability & profiling in accuracy.

## Residue Removal

Residue removal is not needed as this is a no clean solder paste. For assemblies that require cleaning, call Asahi technical support.

## Storage, Handling and Shelf Life

Solder paste has to be thawed to room temperature (~25°C) prior using to avoid condensation. Paste left on the stencil should not be put back into the container together with the unused paste. It is preferable not to re-use solder paste left on the stencil after printing.

Generally the solder paste could last for 6 months from date of manufacturing, if kept under proper condition and temperature of 0 - 10 °C.

## Health and Safety

Do not handle the paste with your bare hand. Use proper tool when handling the paste. If the paste touches the skin, wash thoroughly with soap and water. For more information, please refer to Material Safety Data Sheet.

## Packaging

Packaging Type	Weight	Packaging Part
Jar	500g	E
	250g	F
Cartridge	1000g	D
Cassette	800g	I
Easipak	150g	J
	50g	H

### Solder Paste Product Order System:

Alloy Type      Powder Size      Formula Type - Packaging Part

Example:      SAC0307 4-5MH098-E

#### DISCLAIMER OF LIABILITY

"All statements, information and recommendations contained in this catalog are based on data and test results which we consider, to the best of our knowledge and belief, to be reliable and informative to the users but the accuracy and completeness thereof is not guaranteed. No warranty, expressed or implied, statutory or otherwise, is given regarding the use of the information and products contained in this catalog since the conditions and suitability for use, handlings, storage or possession of the products are determined by the users and are therefore beyond our control. We shall not be liable in respect of any liabilities, losses (including consequential losses), damages, proceedings, costs, claims or injuries whatsoever sustained or suffered by the users (including any third parties) in connection with the use of the information, recommendation and the products contained in this catalog."

## Singapore Asahi Chemical and Solder Industries Pte Ltd

47 Pandan Road Singapore 609288

Tel: +65 6262-1616 Fax: +65 6261-6311

Website: <http://www.asahisolder.com> Email: [enquiry@sinasahi.com.sg](mailto:enquiry@sinasahi.com.sg)