

SAC0307 Solder Powder



Product Description

Continuously strive towards excellent has driven Asahi to manufacturer solder powder with superior quality. Our years of manufacturing experience has enabled us to precisely control and set stringent operating parameters to produce high quality solder powder.

Our solder powder has been optimised to have an unbeatable list of benefits, some are:

- Alloy powder purity, all alloy compositions comply with J-STD-006 standard.
- Exceeding 95% sphericity shape
- Good particle size distribution
- Low surface oxygen content

Powder Size Distribution

Powder Type	Size (µm)
Type 3	25 - 45
Type 4	20 - 38
Type 5	15 - 25
Type 6	5 - 15
Type 7	2 - 11

Particle Shape

Exceeding 95% sphericity shape.

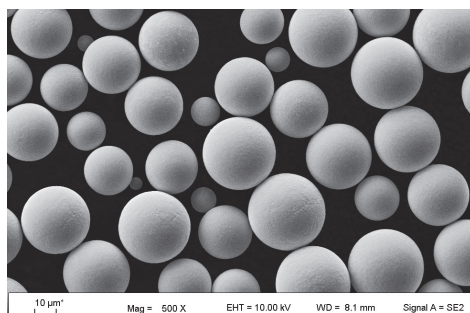


Fig. 1 Typical SEM on the Sphericity of Type 4 Solder Powder

Specification

Item	Result
Alloy Melting Temperature	217 - 229°C
Density	7.30 g/cm ³

DSC at 5°C/min
Water Displacement Method

Alloy Composition

Main Composition		IPC J-STD-006B (wt%)
Tin	Sn	Remainder
Copper	Cu	0.7 +/- 0.1
Silver	Ag	0.3 +/- 0.1
Contamination		
Aluminium	Al	0.005 max
Arsenic	As	0.03 max
Bismuth	Bi	0.10 max
Cadmium	Cd	0.002 max
Iron	Fe	0.02 max
Indium	In	0.10 max
Nickel	Ni	0.01 max
Lead	Pb	0.05 max
Antimony	Sb	0.05 max
Zinc	Zn	0.003 max

DISCLAIMER OF LIABILITY

"All statements, information and recommendations contained in this catalog are based on data and test results which we consider, to the best of our knowledge and belief, to be reliable and informative to the users but the accuracy and completeness thereof is not guaranteed. No warranty, expressed or implied, statutory or otherwise, is given regarding the use of the information and products contained in this catalog since the conditions and suitability for use, handlings, storage or possession of the products are determined by the users and are therefore beyond our control. We shall not be liable in respect of any liabilities, losses (including consequential losses), damages, proceedings, costs, claims or injuries whatsoever sustained or suffered by the users (including any third parties) in connection with the use of the information, recommendation and the products contained in this catalog."

Singapore Asahi Chemical and Solder Industries Pte Ltd

47 Pandan Road Singapore 609288

Tel: +65 6262-1616 Fax: +65 6261-6311

Website: <http://www.asahisolder.com> Email: enquiry@sinasahi.com.sg